ation &

Noura and Joseph, J Bioremediat Biodegrad 2018, 9:1
DOI: 10.4172/2155-6199.1000423

Design of Manure Treatment Alternatives for Hillside Farms Pennsylvania, USA

Al Sarawi Noura* **and Cherinko Joseph**

Environmental Engineering and Earth Science Department, Wilkes University, Pennsylvania, USA

***Corresponding author:** Al Sarawi Noura, Environmental Engineering and Earth Science Department, Wilkes University, Pennsylvania, USA, Tel: 00 965 99179176; E-mail: nalsa003@fu.edu

Rec date: December 07, 2017; **Acc date:** December 14, 2017; **Pub date:** January 2, 2018

Copyright: É 2018 Noura AS, et al. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.

Abstract

An alternative treatment system for cow manure at The Lands at Hillside Farms, a 60 cow b"uýQUSca[Lcatment snтem fоatBmMF]at Hills digester, anaerobic bag digester, and vermicomposting. The most practical manure treatment system was determined to be a vermicomposting system. The vermicomposting system employs *Eisenia Fetida*, a type of earth worm, to process the manure. The vermicomposting system consists of 12 units, each with a length and width of 4.6 m, and a depth of 0.3 m. To reduce costs and take advantage of *Eisenia fetida's* rapid reproduction ability, it was decided to initially purchase 5% of the total required worms. Each vermicomposting unit was estimated to cost $1,035, resulting in a total cost of $12,420. The primary concern for the treatment system is in regard to its performance during periods of low temperature. *Eisenia fetida's* manure processing rate declines with temperature. Hillside Farms should investigate the feasibility of installing a greenhouse or similar structure to insulate the vermicomposting units. The research paper herein contains valuable information that may assist other small farms exploring manure treatment options.

Keywords: Manure; *Eisenia fetida*; Lagoon; Traditional composting; Traditional anaerobic digester; Anaerobic bag digester; Veri] _ tę ĤN ;& ʌθ - / я a ń

T e main objectives of this study are:

- To study and evaluate the three designs-an anaerobic digester, a lagoon, and a vermicomposting system were developed.
- To investigate the feasibility of installing a greenhouse or similar structure to insulate the vermicomposting units.
- Design manure treatment alternatives for a nonprofit farm to mitigate the adverse effects of agricultural runoff containing animal manure on the environment while making the farm's operations more efficient and highlighting its mission of environmental sustainability.
- Provide cost analysis for each design option.

T e facility is a hands-on educational farm open to the public, it organizes a variety of events and activities to promote conservation and sustainability. T ey would like to be considered as a model for other farms, businesses, and even individuals regarding how to live and operate in a more environmentally conscious manner. At the farm, 60 milking cows are comprised of three species: Jersey, Holstein, and Brown Swiss. Julie Ealloph, agricultural educator at Hillside Farms, estimates that the selected treatment facility should be sized to process 530,000 kg of cow manure per year. T e size of the treatment facility must also take into account manure density and detention time. Other animals at Hillside Farms include oxen, chickens, sheep, goats, donkeys, and horses.

T e most important environmental issues stemming from untreated manure are water, soil, and air pollution. Farm and dairy operations produce large quantities of manure that must be used and stored properly or risk damage to the surrounding environment. Heavy rainstorms and snowmelt have the ability to carry manure into nearby waterways or groundwater. Manure is rich with substances that can cause adverse environmental effects, including pathogens, phosphorous, ammonia, and nitrogen.

T e three manure treatment designs included an anaerobic digester, a lagoon, and a vermicomposting system. Grant opportunities to assist the farm with funding have been explored. T e recommended option should mitigate the adverse effects of manure on the environment while making the farm's operations more e f cient and highlighting its mission of environmental susta ⅜]n al n nmen ↑ioi" ṅ kÔAp[D]m al ₉" he oject, bu vc,ʁvc,ʁ ion o

Huntsville Creek is adjacent to the feeding barn at Hillside Farms, which puts the creek at immediate risk for runoff from the feeding barn. T e creek flows into the Susquehanna River, which flows into the Chesapeake Bay. T e Chesapeake Bay has problems with excessive

nutrients, which are often attributed to agricultural runoff. The Chesapeake Bay Foundation, a nonprofit organization dedicated to the

and 35°C; the processing rate declines with decreasing temperature. T is is a concern given the location of Hillside Farms. Borah et al. [8] in their study vermicomposting is rich in several enzymes and growth regulations such as auxins, and gibberellins.

Vermicomposting holds other advantages over conventional composting. It occurs at a quicker rate, taking 22-32 days compared with 30-40 days for the same volume composted conventionally. Also, the community around Hillside Farms is saturated with compost suppliers. Farms and other places of business distribute it freely, making it di f cult to sell to consumers. Vermicomposting, in addition to vermicomposting, produces worms. Excess worms can be sold for pro f t to o f set

T e

This total volume has been chosen to be partitioned across 10 units. With a chosen diameter of 2 m, the length of each unit reaches 14.3 m.

A suitable location must then be determined. Our site is out of the 100 yr food plain, has fairly flat topography, and is near the two sources of manure production. Preferably, the manure travels by gravity to the inlet of the bag digester, although this may not be possible in practice. Typically, a trench is dug in a trapezoidal fashion to promote stability while allowing room for maintenance. It's vital to ensure that the lining of the trench is absent of any sharp rocks or other protrusions that may puncture the bag digester.

The polyethylene bag is the primary and most important piece of the design, although individual sheets may be used if bags may not be procured. If sheets must be used, they can be joined together using a variety of methods, the simplest of which are gluing and using a hot clothes iron. These bags contain an ultraviolet filter which assists their durability when exposed to the sun. Two bags are generally used to increase the strength and durability of the bag digester. Increasing the mill, or thickness, of the bags will increase their lifespan and cost. A suitable thickness is roughly 10 mils. The two bags should fit together with minimal folds or creases.

The gas outlet allows the produced biogas to be collected and utilized. Approximately 60% of the biogas will be composed of methane. After the appropriate measures are taken to eliminate hydrogen sulfide, the methane may be used to power operations at the farm. Hydrogen sulfide is a corrosive gas which can be eliminated via scrubbing or filtration through activated carbon. It is expected that the bag digester will produce 55 m^3 of gas per day which is equivalent to 290 kWh. Figure 4 for a concise overview of the gas outlet. It is generally placed in the middle of the bag.

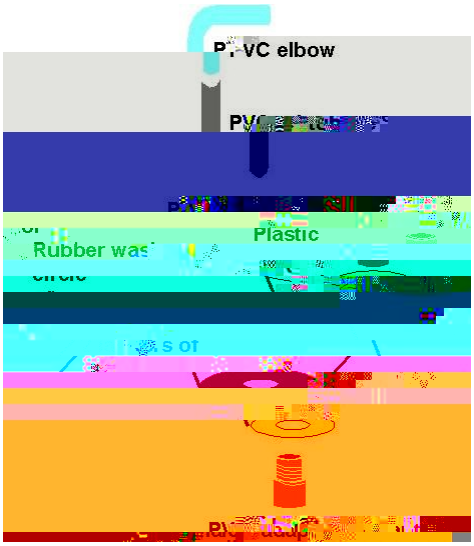

Figure 4: Gas Outlet Configuration (Food and Agriculture Organization of the United Nations).

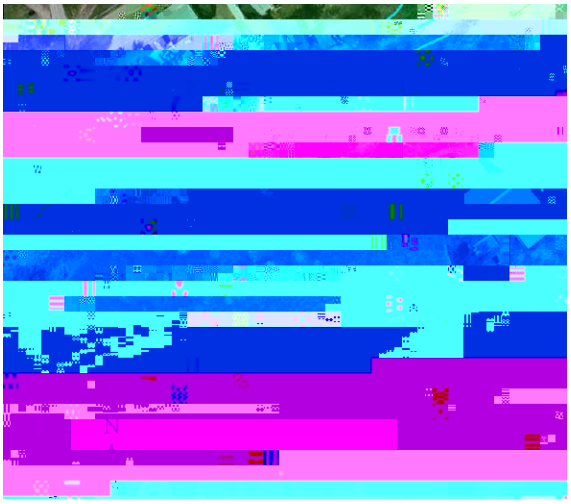

Figure 10: Vermicomposting Unit in ArcGIS.

As stated previously, the system requires 9,675,000 red wiggler worms to process the daily manure production. For cost estimation purposes, online retailer WORM PAL offers 2000 red wiggler worms, or 2 pounds, for $40 USD. Assuming that the advertised 2 pound figure is all worm-weight, with no filler,